



7032 Alondra Boulevard • Paramount, California 90723  
P.O. Box 739 • (310) 633-0605

# INSTRUCTION SHEET

## UNIVERSAL STRAIGHTBACK LADDER


### Model 502L

### INSTALLATION

#### YOU WILL NEED:

- ✓ Drill with 3/16" and 1/4" bits
- ✓ Phillips-point Screwdriver
- ✓ Hack saw or Tube cutter
- ✓ 24 Mounting screws (provided)


1. Assemble two ladder sections and top loops. (See Ladder Assembly)
2. Determine placement of ladder on coach. Note: standard length of 75" can be modified up to 77" by shortening the top loops. (Use the procedure illustrated for length adjustment.)
3. Locate desired points for the 2 support extensions.
4. Drill 1/4" holes thru ladder at desired locations and install supports.
5. Install on unit at desired location.

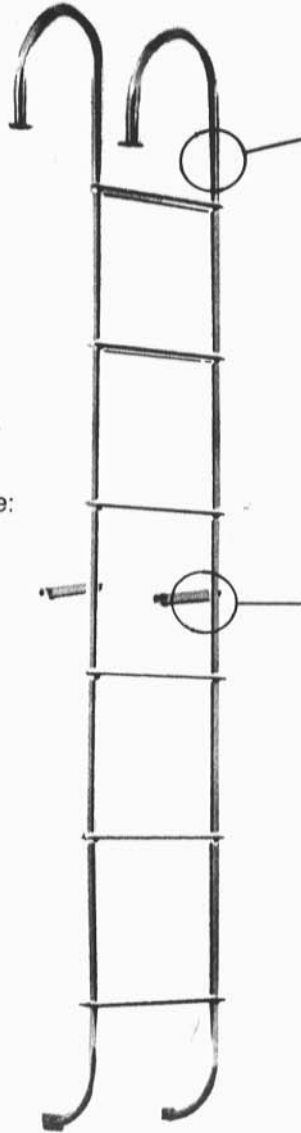

#### LADDER ASSEMBLY:

Assemble top loops to upper ladder assembly and upper assembly to lower assembly by inserting tapered rails into open rails. Fasten together by inserting 1 1/4" long screw through assembly and fastening with lock-nut.

2 Support extensions can be located any place up or down the ladder. Drill 1/4" holes thru ladder rails at desired location.

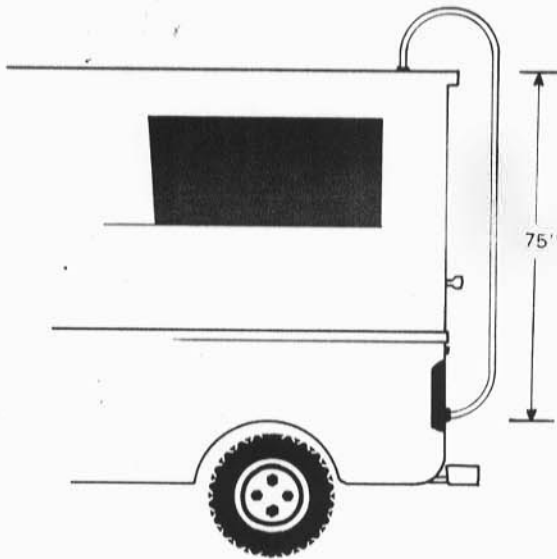

### FOR LENGTH ADJUSTMENT

1. Cut straight section of loop to desired length and remove flange.
2. Drill 3/16" hole through Flange and Tube. Install with No. 10 x 1 1/2" screw and nut.

